

SAVE THE DATE!
RTA Summer
Field Trip
June 1-5
Page 5

JANUARY/FEBRUARY 2014


Crossties

THE MAGAZINE FOR PRODUCERS & USERS OF TREATED WOOD CROSSTIES & RELATED PRODUCTS

INTERESTING TIMES

Tie Purchases Healthy...
How Will Supply
Respond?

Tie
Market
Outlook
for 2014 &
Beyond

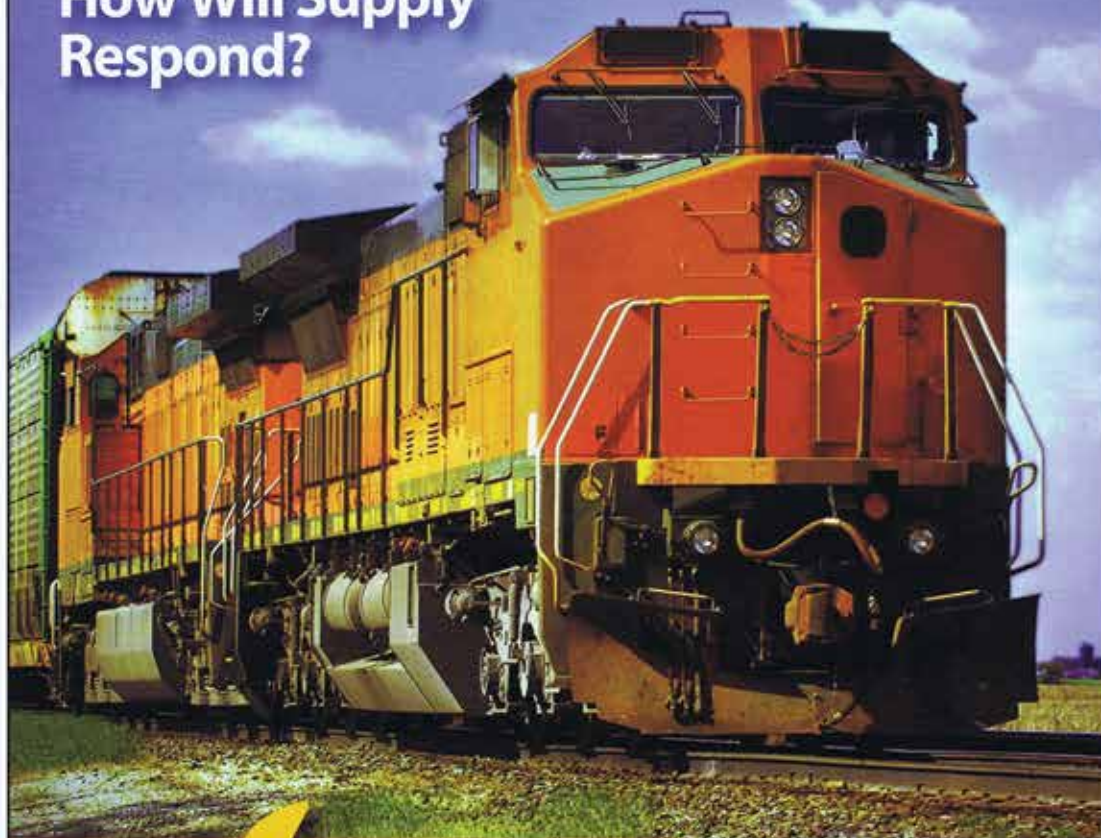

SPECIAL REPORTS:

Industry Updates,
Plant News
& More

ASLRRRA Update:
45G Tax Credit
Extension tops
ASLRRRA's "to do"
list for 2014

Bridge To
Success...
Extending the
life of wood
transportation
structures

Tie Market
Outlook

Tie Trends
focuses
on **MAINE**



RTA makes official
comment to USDA
on proposed
Hardwood
Checkoff
Program

Page 6

Bridge To Success...

Extending The Life Of Wood Transportation Structures

A Conference Follow-Up From Dr. Jeffrey Lloyd


Editor's Note: At the recent RTA Conference in Incline Village, Nev., Nisus Corporation presented information about a new experimental research project being conducted in conjunction with a Class 1 railroad. The specific area of interest was improving the performance of bridge ties and timbers in high-decay areas. The following describes the scope of the work, what information has been gleaned to date, and the unanswered questions that remain in the quest for continual improvement options for wood ties and timbers in railroad applications.

In 2010, a hypothesis was formulated that could lead to the expanded use of borates and other standardized treatments, other than creosote, for bridge timbers and ties. In 2013, Nisus Corporation developed a protocol for an in-service research project to prove the hypothesis and worked with Norfolk-Southern Corporation & Mellott Wood Preserving Company to install the test. The theory behind it is by utilizing

borates and copper naphthenate in a Boulton-cycle treating process that improvement in hardwood bridge tie and timber performance could be achieved.

Considered parameters for improvement include the reduction of preservative bleeding after installation coupled with improvement in in-service and life-cycle performance. While proof of either postulate has not been published yet due to the ongoing investigation, the initial observations suggest that both goals may be ultimately achievable.

Some railroads report that bridge ties and timbers, Boulton treated with creosote to current standards, fall below the average service life for established system-wide of

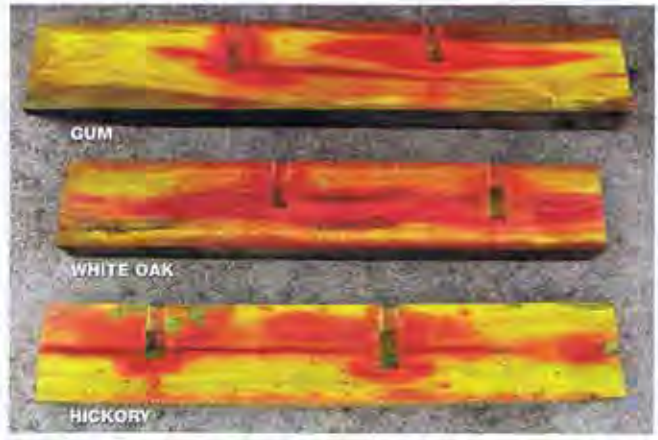

Several species of hardwood were treated for installation and testing.

33-45 years for railroad crossties in some high-decay areas. Such reports are documented in varying ways, and thus the hard data for actual service life must be tempered by the inexact science used for collecting and reporting the data.

However, if the reported service life of bridge materials is accurately described >



Wheeler Lumber

Committed to performance since 1892

QNAP™

COPPER NAPHTHENATE

Treated Ties & Timbers

Proven oil-borne preservative preferred for environmentally sensitive areas

Engineering and Shop Drawings services available

800.843.8304 www.wheeler-con.com dakoch@wheeler-con.com

AWPA Standards

AREMA Approved

Cleaner Handling

No Corrosion Concerns

TPI Certified Facility



Dr. Jeff Lloyd kneels next to a bridge timber that was cut in half, sectioned longitudinally, and sprayed with curcumin to show the borate penetration (red areas) immediately after treatment. Also note the vertical BTX ports that were used to inject the borates at initial treatment.

as less than optimal, the problem created is the significantly increased railroad maintenance costs associated with safe bridge operations. Is it worthwhile to seek improved performance even at increased costs? That is a fair and reasonable question given what some railroads have done in bridge material replacements with even more expensive non-wood alternative materials.

The research project was designed to investigate if an increase in the service life of wooden bridge timbers could be achieved, at only nominal additional cost, with the latest dual wood preserving

technologies utilizing DOT borate and copper naphthenate.

Green hardwood bridge ties (10" x 10" x 10') were ported, (holes drilled and filled with Nisus-patented BTX™ sleeve inserts) borate treated and capped, and then Boulton treated in copper naphthenate for 18 hours. Following an initial report on the treating process at the RTA Conference, the timbers were longitudinally sectioned and sprayed with curcumin, after the method of Smith and Williams 1967.

The photo above shows that following the Boulton cycle, all of the borates applied to the ports had diffused into the ➤

center of the untreated heartwood and traveled much of the length of the ties. In this specific test, both copper naphthenate and DOT borate gauge retentions met AREMA guidelines and AWWPA Standards.

Diffusion of borate within the wood was significant. The results suggest that this occurred and was facilitated by both the elevated temperature employed during the Boulton cycle and the live steam generated and will only be further enhanced with continued diffusion in service.

Should the final research results confirm the initial sampling, one could expect the performance of bridge ties and timbers treated in this manner to match that found by Dr. Amburgey and reported in *Crossties* in 2010 and 2011. A paper on the installation and initial results with conclusions will be presented at special session on Protecting Rail Ties and Timbers at the International Research Group on Wood Protection meeting in May in St. George, Utah (www.irg-wp.com). Since some railroads are looking for at least an additional 10-year service life in bridge ties and timbers, the hope is to soon be able to report this goal can be achieved with this approach to wood preservation.

One additional note is important about the porting of the timbers using BTX sleeves. One advantage over other methodologies of this dual-treatment system is that *in situ* preservative "top-up" after installation can occur much more easily with associated cost efficiencies when BTX ports/sleeves are installed at time of initial treatment. Remedial treatments with either DOT borate only, Nisus developed propriety pastes, or liquids containing copper and DOT borates or DOT and glycol can be injected into the uncapped then re-capped BTX ports with ease should a railroad desire to keep the loadings of preservatives as high as possible throughout the life of the structure. ■

Jeffrey Lloyd, Ph.D., who designed this research project and provided slides and the materials for the RTA conference report, is vice president of Research & Development for Nisus Corporation. He is also president of the International Research Group on Wood Protection and serves on the Railway Tie Association's Research & Development Committee and on the Executive Board for the American Wood Protection Association.



Pictured above are images of BTX ports. *Left:* A BTX port installed prior to injection. *Center:* A BTX port prior to capping filled with DOT borate (Cellutreat™). *Right:* A BTX port empty after the Boulton cycle using Copper Naphthenate.

Dual-Treated Perfection

The 2-Step Borate + Copper Naphthenate Treatment

Add dual-treated ties to your green sustainability program using a Cellutreat® DOT borate treatment prior to air seasoning followed by a QNAP® copper naphthenate overtreatment.

CELLUTREAT® DOT BORATE WOOD PRESERVATIVE



Diffusion of Cellutreat into hardwood (gum) shown by red curcumin indicator.

- ✓ Eliminates incipient decay during air seasoning.
- ✓ Reduces stack burn.
- ✓ Prevents corrosion & core-induced decay.
- ✓ Reduces checking and protects heartwood.
- ✓ Data shows dual-treated ties are stronger than untreated ties.

QNAP® COPPER NAPHTHENATE



QNAP penetration into hardwood (gum) shown by blue Chrome Azurol S indicator.

- ✓ Performance equal to or better than other oil borne preservatives.
- ✓ Clean handling characteristics.
- ✓ Non-corrosive to skin.
- ✓ Virtually no drippage.
- ✓ EPA non-restricted use preservative.
- ✓ Great for crossties, switch ties & bridge timbers.

Dual Treatments. Just a 2% weight loss from decay can create a 30%-50% strength loss. Dual synergistic treatments using Cellutreat® DOT borate prior to air seasoning followed by treatment with QNAP copper naphthenate will improve your return on investment and provide worker and environmental safety while supporting your green sustainability tie and timber program.



Nisus
CORPORATION

Call Kevin Kirkland or Ken Laughlin
800.264.0870 or visit www.nisuscorp.com